



SERIES 5506 T5 PENDANT



Applications

Offices, hotels, shopping centres, hospitals, schools.

Technical specification

Suspended luminaire for direct or direct/indirect lighting for T5 fluorescent lamps.

Body

Pressed 0.5mm perforated sheet steel with white powder paint finish and 1.5mm anodized aluminium profile sides.

Optical accessories

Reference/16 - dark light aluminium louvre:

Ideal for work environments with computer display monitors. Louvre with broad symmetrical batwing light distribution featuring longitudinal reflectors and double transverse blades, in anodized anti-iridescent 99.9% pure aluminium MIRO reflector with mirror finish. Direct longitudinal and transverse luminance less than 200 cd/m² for vertical angles over 60°.

Control gear and electric circuit

Electronic ballast 230-240V/50-60Hz warm start with HT 90°C heat-resistant wiring.

Dimmable electronic ballast EBD on request.


Emergency supply

Emergency supply (EES Version) on request.

Lamp

Complete with T5 LongLast™ 4000K lamp.


Dimensions (mm)

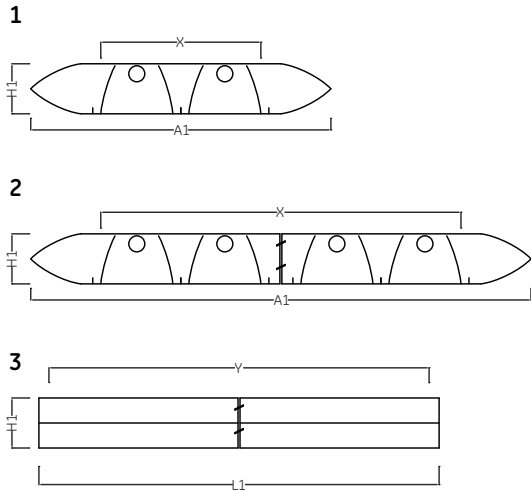


Luminaire Type	Luminaire Dimensions (mm)			Fixing Holes distance (mm)	
	A1	L1	H1	X	Y
14W					
5506 2x14	330	590	55	138	485
5506 3x14	570	590	55	373	485
5506 4x14	570	590	55	373	485
24W					
5506 2x24	330	590	55	138	485
5506 3x24	570	590	55	373	485
28W					
5506 1x28	250	1188	55	58	1150
5506 2x28	330	1188	55	138	1150
35W					
5506 1x35	250	1488	55	58	1450
5506 2x35	330	1488	55	138	1450
5506 3x35	570	1488	55	373	1450
54W					
5506 1x54	250	1188	55	58	1150
5506 2x54	330	1188	55	138	1150
5506 3x54	570	1188	55	373	1150

Photometric data


SERIES 5506 T5 2x14W PENDANT

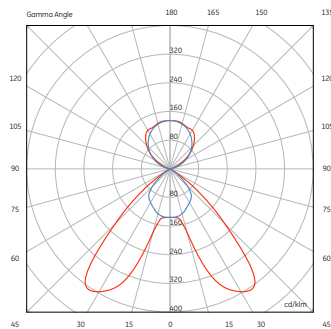


SERIES 5506 T5 2x28W PENDANT

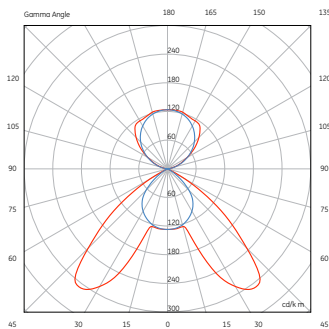

SERIES 5506 T5 2x35W PENDANT

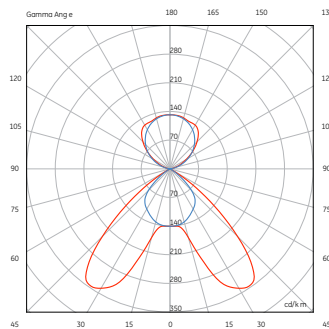

SERIES 5506 T5 2x54W PENDANT

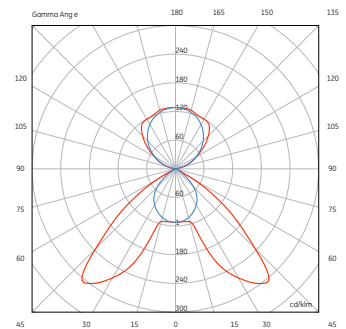

Series 5506 Pendant for T5 fluorescent lamps with electronic ballast

CEI 4.21 / EN 60598-1, IEC 60598 - Class I - IP20
230-240V / 50-60Hz

Description	Lamp	Weight (kg)	Pack qty	Product code
14W				
5506 T5 SUSPENSION 2x14W / 16EB	2 x F14W/T5/840	2.2	1	44349
5506 T5 SUSPENSION 3x14W / 16EB	3 x F14W/T5/840	4.4	1	44351
5506 T5 SUSPENSION 4x14W / 16EB	4 x F14W/T5/840	3.9	1	44353
24W				
5506 T5 SUSPENSION 2x24W / 16EB	2 x F24W/T5/840	2.2	1	TBD
5506 T5 SUSPENSION 3x24W / 16EB	3 x F24W/T5/840	4.3	1	TBD
28W				
5506 T5 SUSPENSION 1x28W / 16EB	1 x F28W/T5/840	3.2	1	TBD
5506 T5 SUSPENSION 2x28W / 16EB	2 x F28W/T5/840	3.9	1	44348
5506 T5 SUSPENSION 3x28W / 16EB	3 x F28W/T5/840	8.3	1	44352
35W				
5506 T5 SUSPENSION 1x35W / 16EB	1 x F35W/T5/840	4.5	1	TBD
5506 T5 SUSPENSION 2x35W / 16EB	2 x F35W/T5/840	4.8	1	TBD
54W				
5506 T5 SUSPENSION 1x54W / 16EB	1 x F54W/T5/840	3.2	1	TBD
5506 T5 SUSPENSION 2x54W / 16EB	2 x F54W/T5/840	3.9	1	44347
5506 T5 SUSPENSION 3x54W / 16EB	3 x F54W/T5/840	8.3	1	44354

Complete with T5 LongLast™ 4000K lamp
16 dark light aluminium louvre
EBD with dimmable electronic ballast - available on request
EES with remote emergency group - available on request